




BORSIG

LEADING TECHNOLOGY FOR INNOVATIVE SOLUTIONS



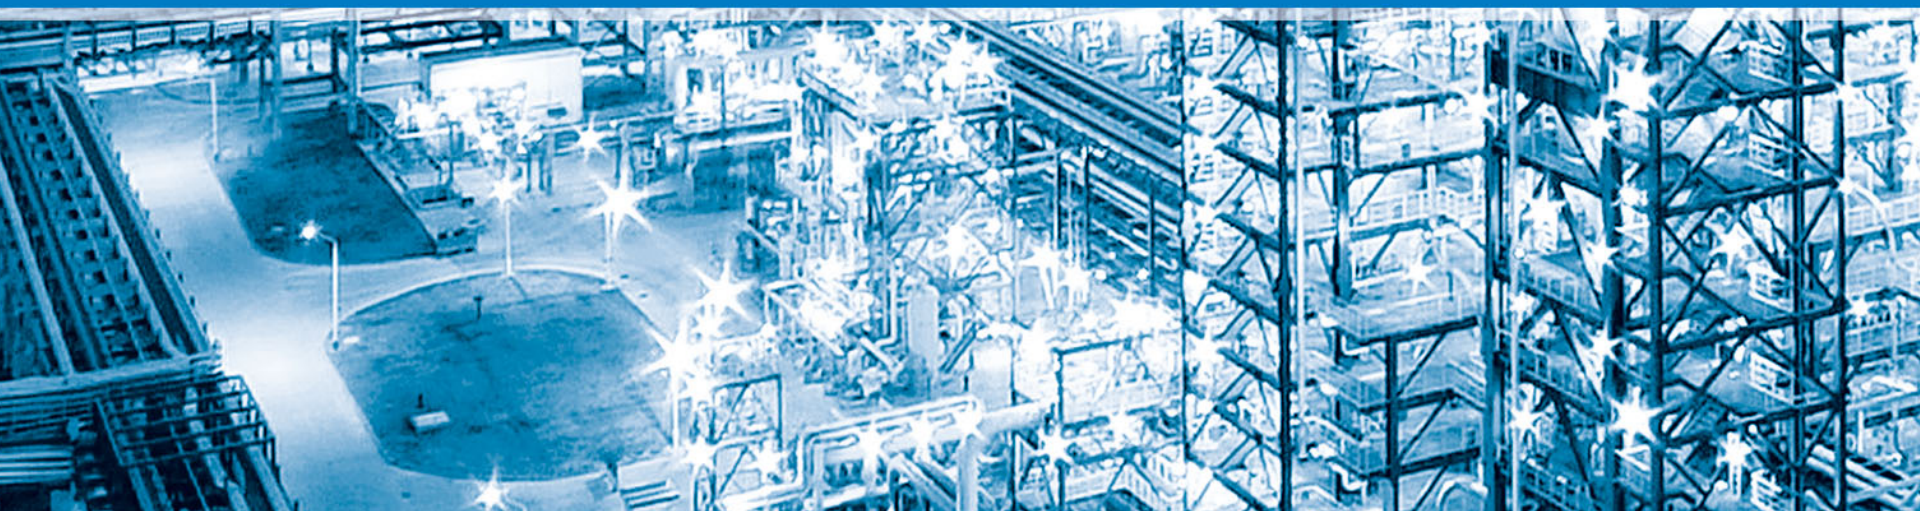

Technology Update BORSIG ZM COMPRESSION GmbH

EFRC 2018 Madrid

Product Range Update (1/2)



Tailor-Made Bx-Range							
	BX22	BX28	BX32	BX36	BX40	BX45	BX50
Max. stroke [mm]	220	280	320	360	400	450	500
Max. speed [rpm]	750	600	600	550	450	400	350
Market Segment	Upstream						
	Downstream						


Product Range Update (2/2)



Standardized Bx-Range		Tailor-Made Bx-Range					
	BX15	BX22	BX28	BX32	...	BX45	BX50
Max. stroke [mm]	150	220	280	320	...	450	500
Max. speed [rpm]	1200	750	600	550	...	400	350
Market Segment	Upstream		Downstream				

Characteristics BX15

- Packaged unit acc. ISO 13631 / API11P
 - Skid mounted including all necessary components
- Direct coupling with gas engine possible
- Suitable for compression of sour gas
- 8 standardized cylinder sizes
 - Diameter from 125mm to 525mm
 - max. discharge pressure 100 bar
- Easy adaption to changes in operating conditions
 - standardized cylinders can be connected in any order on every BX15 crankcase
- Short delivery time

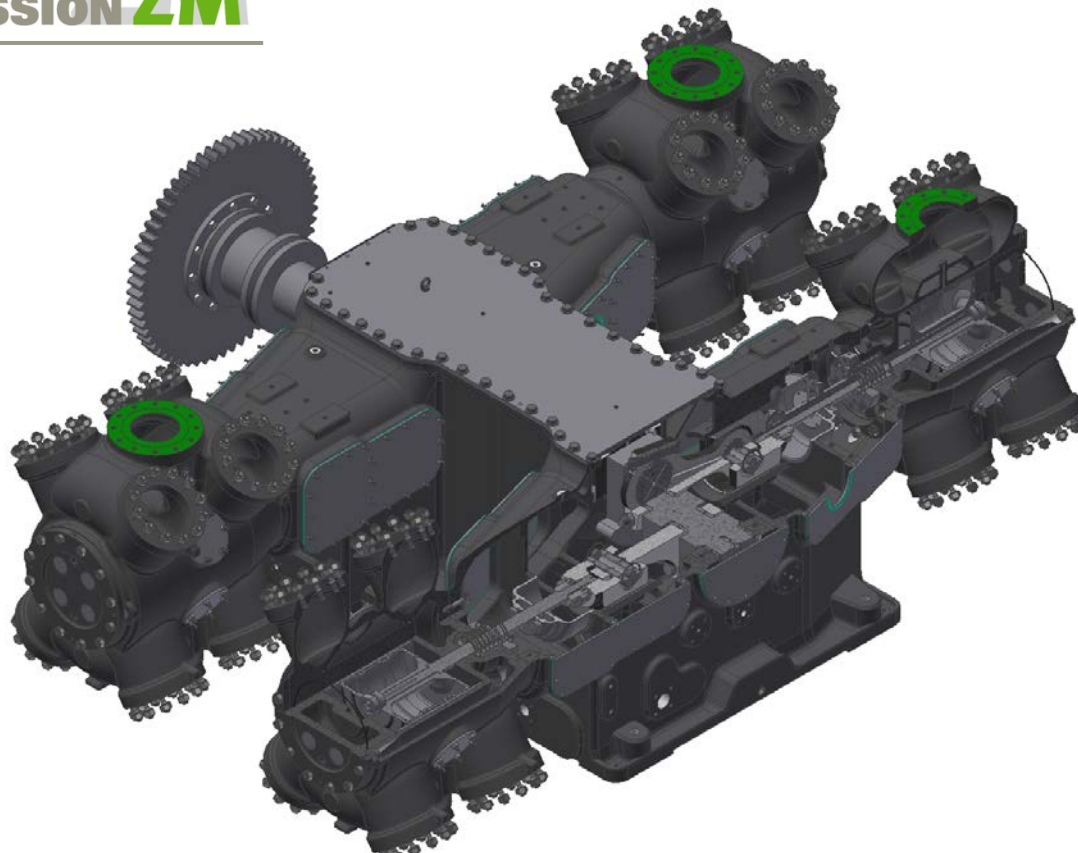

Thank you for your kind attention!

Visit us @ Booth No. 7